

Keysight M8196A

92 GSa/s Arbitrary Waveform Generator

Preliminary
Data Sheet



M8196A in a 2-slot AXIe chassis

M8196A at a Glance

The Keysight Technologies, Inc. M8196A arbitrary waveform generator (AWG) has the highest sample rate and the widest bandwidth in its class with up to four synchronized channels operating simultaneously on one module.

- Sample rate up to 92 GSa/s (on up to 4 channels simultaneously)
- Analog bandwidth: 32 GHz (typical)
- 8 bits vertical resolution
- 512 kSa of waveform memory per channel
- 1, 2, or 4 differential channels per 1-slot AXIe module (number of channels is software upgradeable)
- Amplitude up to 1 Vpp(se) (2 Vpp(diff.)), voltage window –1.0 to +2.5 V
- $t_{\text{rise/fall}}$ (20%/80%) < 9 ps (typical)
- Ultra-low intrinsic jitter
- Built-in frequency and phase response calibration for clean output signals

Coherent Optical Applications

200 G, 400 G and 1 Terabit applications demand a new class of generators that provide high speed, precision and flexibility at the same time.

The M8196A is the ideal solution to test different optical systems from discrete components like optical power amplifiers to more complex dual polarization systems like optical modulators or optical receivers.

With up to 4 channels per 1-slot AXIe module, each running at up to 92 GSa/s with 32 GHz of analog bandwidth, it allows dual polarization testing in a small form factor and the generation of complex signals with multiple modulation schemes (PAM-4, PAM-8, QPSK, nQAM) up to an outstanding speed of 64 GBaud and beyond.

Compensation for distortions generated e. g. by cables and amplifiers can be realized by embedding/de-embedding the S-parameters of the respective circuits or by performing an in-situ calibration using the Keysight Technologies vector signal analysis software.

Combined with the 81195A optical modulation generator software, the M8196A makes it easy to generate optical impairments (e.g. PMD) for stressing the optical receiver over multiple test scenarios.

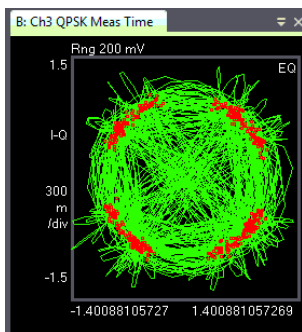


Figure 1. QPSK signal with emulated phase noise

Multi-Level/Multi-Channel Digital Signals

The M8196A is also ideally suited to address multi-level/multi-channel interfaces using any standard or custom data format, for example high-speed backplane connections using PAM-4 or PAM-8 format, as well as technologies in the mobile application space.

The flexibility of the waveform generation at its highest speeds, combined with excellent intrinsic jitter performance makes the M8196A a truly future-proof instrument.

At data rates of multiple Gb/s, the effect of cables, board traces, and connectors etc. has to be taken into account in order to generate the desired signal at the test point of the device under test. The M8196A incorporates digital pre-distortion techniques for frequency- and phase-response compensation of the AWG output and any external circuit to generate the desired signal at the device under test. Channels can be embedded/de-embedded if the S-parameters of the respective circuits are provided.

In conjunction with the 81195A optical modulation generator software various kinds of distortions can be added to the signal.

With its high channel density the M8196A is well-suited to affordably and precisely stimulate multi-lane high-speed interfaces.

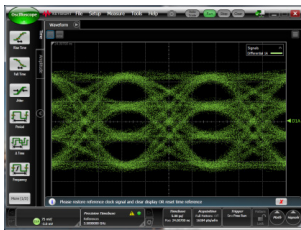


Figure 2. PAM-4 signal at 56 GBaud

Physics, Chemistry and Electronics Research

With the M8196A AWG it is possible to generate any arbitrary waveform you can mathematically describe and download it directly to the M8196A. This includes ultra-short yet precise pulses down to 20 ps pulse width or extremely short, yet wideband RF pulses and chirps which are needed to investigate in live time chemical reactions and elementary particle excitation.



Figure 3. Emulation of chirps

Configuration

Product

Product number	Description	Comment
M8196A-001	Arbitrary waveform generator module 1 channel, 92 GSa/s, 512 kSa per channel	
M8196A-002	Arbitrary waveform generator module 2 channels, 92 GSa/s, 512 kSa per channel	Must choose one: 001, 002, or 004
M8196A-004	Arbitrary waveform generator module 4 channels, 92 GSa/s, 512 kSa per channel	
M8196A-BU2	Bundle consisting of one M9502A 2-slot AXIe chassis with USB option	
M8196A-BU3	Bundle consisting of one M9502A 2-slot AXIe chassis with USB option and one M9536A AXIe embedded PC controller	

Upgrade options

Product number	Description	Comment
M8196AU-U02	Upgrade from 1 channel to 2 channels	User-installable software license
M8196AU-U04	Upgrade from 2 channels to 4 channels	User-installable software license

Accessories

In order to be operational, an AXI chassis plus either an embedded controller or external PC or laptop are required in addition to one or more M8196A modules:
(See <http://www.keysight.com/find/AXIe> for more details)

Product number	Description	Comment
M9502A-U20	2-slot AXIe chassis with USB Option	Choose chassis size: 2 slots or 5 slots
M9505A-U20	5-slot AXIe chassis with USB Option	
M9536A	AXIe embedded controller	Choose either M9536A or 8121-1243
8121-1243	Cable assembly USB Type A-MINI B	
M9048A	PCIe® desktop card adapter Gen 2 x8	
Y1202A	PCIe cable for M9048A desktop adapter	or
M9045B	PCIe laptop card adapter Gen 1 x4	M9048A+Y1202A or M9045B+Y1200B
Y1200B	PCIe cable for M9045B laptop adapter	
M8196A-810	Matched cable pair for M8196A AWG, 2.4 mm	
M8196A-820	Termination 50-Ohm, 2.4 mm	

Software

Product number	Description	Comment
N6171A-M02	MATLAB license (standard)	User-installable software license
N6171A-M03	MATLAB license (extended)	User-installable software license
81195A	Optical modulation generator software	User-installable software license
81195A-OSP	Optical signal properties	User-installable software license

Specifications

General characteristics

Sample rate	82.24 to 93.4 GSa/s
DAC resolution	8 bits
Number of channels per M8196A module	1, 2, or 4 (corresponds to Opt. 001, 002, and 004) Additional number of channels can be enabled via user-installable software license

Sample memory

Sample memory	512 kSa per channel. The waveforms in each channel can have different length
---------------	--

Out 1, 2, 3, 4

Output type	Single-ended ¹ or differential
Analog bandwidth (3 dB, excl. sin(x)/x roll-off)	32 GHz (typ)
Rise/fall time (20%/80%) ^{2,3}	9 ps (typ)
Impedance	50 Ω (nom)
Amplitude	250 mV _{pp(se)}} to 1 V _{pp(se)}} into 50 Ω 500 mV _{pp(diff.)}} to 2 V _{pp(diff.)}} into 50 Ω
Amplitude resolution	400 μ V (nom)
DC amplitude accuracy ³	\pm (2.5% +10 mV) (typ)
Voltage window	-1.0 to +2.5 V single-ended into 50 Ω
Offset resolution	400 μ V (nom)
DC offset accuracy ⁴	\pm 20 mV (typ)
Differential offset	Adjustable
Termination voltage window	-1.5 to +3.5 V (low level -500 mV) to (high level + 500 mV)
Termination voltage resolution	300 μ V (nom)
Skew between any pair of outputs	0 ps \pm 7 ps (typ)
Skew between normal and complement	0 ps \pm 3 ps (nom)
Harmonic distortions ^{5,6}	
2nd harmonic	<i>tbd</i>
3rd harmonic	<i>tbd</i>
Two-tone IMD ⁶	<i>tbd</i>
SFDR ⁶ (excluding harmonic distortions)	
In-band	<i>tbd</i>
Adjacent band	<i>tbd</i>
Amplitude flatness (at RF output connector, compensated for sin(x)/x)	<i>tbd</i>
Connector type	2.4 mm (female)

1. Unused output must be terminated with 50 Ω to GND.

2. With frequency response correction

3. Termination voltage = 0 V; adjusted at 23 °C ambient temperature, amplitude increases by 0.4%/°C (typical) for ambient temperature below 23 °C


4. Termination voltage = 0 V

5. Sample rate 92 GSa/s, output amplitude 500 mVpp(se)

6. Measured with a balun (e.g. HL9405)

Phase noise

Phase noise measured with a sample rate of 92 GSa/s, at Out 1, single-ended, 500 mV amplitude

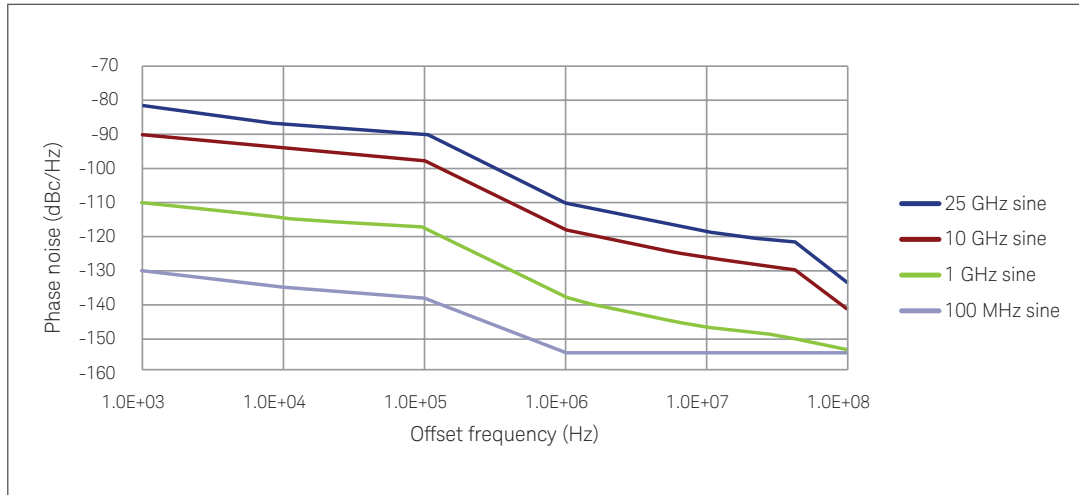

Run modes

Run modes	
Continuous	One waveform segment is continuously repeated
Waveform granularity (the length of waveform segments must be a multiple of the granularity)	128 samples
Minimum waveform length	128 samples

Trigger input

This connector is reserved for future enhancements.

Timing characteristics

Delay accuracy	<i>tbd</i>
Skew between channels 1, 2, 3, or 4 of one M8196A AWG module	0 ps ±5 ps (typ)
Total jitter, with pre-distortion	<i>tbd</i>
Random jitter, RMS	150 fs (typ)

Reference clock input

A clock reference input is provided on the front panel of the M8196A and used as the clock reference for all four channels of that M8196A.

Input frequency range	10 MHz to 17 GHz (continuous)
Lock range	$\pm 1\%$ (typ)
Input level	200 mVpp to 2 Vpp
Impedance	50 Ω (nom)
Connector	SMA (female)

Reference clock output

Source: Backplane	
Output frequency	$f_{out} = f_{Sa} / (32 * n)$ with $n = 1$ to 1024 or $f_{out} = f_{Sa} / 256$
Frequency accuracy	± 20 ppm
Source: Internal	
Output frequency	$f_{out} = f_{Sa} / (32 * n)$ with $n = 1$ to 1024 or $f_{out} = f_{Sa} / 256$ or $f_{out} = 100$ MHz
Frequency accuracy	± 2 ppm
Source: Reference Clock Input of M8196A	
$f_{in} = 10$ to 300 MHz	$f_{out} = f_{Sa} / (n * m)$ with $n, m = 1$ to 8
$f_{in} = 2.570$ to 2.920 GHz	$f_{out} = f_{in} / 8$
$f_{in} = 210$ MHz to 17 GHz	$f_{out} = f_{Sa} / (32 * n)$ with $n = 1$ to 1024 or $f_{out} = f_{Sa} / 256$
Output amplitude	1 V_{pp} (typ) into 50 Ω
Source impedance	50 Ω (nom), AC coupled
Connector	SMA (female)

Internal synthesizer clock characteristics

Frequency	82.24 to 93.4 GHz
Accuracy	± 2 ppm
Resolution	7 digits (for example: 9 kHz at 90 GHz)
Phase noise ($f_{sa} = 92$ GHz)	< -100 dBc/Hz (typ) at 10 kHz offset, $f_{out} = 1$ GHz < -100 dBc/Hz (typ) at 10 kHz offset, $f_{out} = 10$ GHz

Download speed

	USB using SCPI	PCIe using SCPI
Download Speed	~80 kSa/s (meas)	~1.6 MSa/s (meas)

Note: Loading 4 channels waveform memory requires 2 MSa download

Instrument software

The M8196A is controlled by a combined soft-front panel and firmware application that runs on an embedded AXIe controller or external PC or laptop.

Supported operating systems	Windows 7 (32 or 64 bit), Windows 8 (32 or 64 bit), Windows 8.1 (32 or 64 bit)
Required hard disk space	1 Gb
Interface to M8196A hardware	PCI Express® or USB
Application programming interfaces	SCPI, IVI-COM, LabView

General

Power consumption	tbd W (nom) at 92 GSa/s
Operating temperature	0 to 40 °C
Operating humidity	5% to 80% relative humidity, non-condensing
Operating altitude	Up to 2000 m
Storage temperature	-40 to +70 °C
Stored states	User configurations and factory default
Interface to controlling PC	PCIe (see AXIe chassis specification) USB
Form factor	1-slot AXIe
Dimensions (W x H x D)	322.25 mm x 30 mm x 281.5 mm
Weight	3.15 kg
Safety designed to	IEC61010-1, UL61010, CSA22.2 61010.1 tested
EMC tested to	IEC61326
Warm-up time	30 min
Calibration interval	2 years recommended
Warranty	3 years standard
Cooling requirements	When operating the M8196A choose a location that provides at least 80 mm of clearance at rear, and at least 30 mm of clearance at each side

Definitions

Specifications

The warranted performance of a calibrated instrument that has been stored for a minimum of two hours within the operating temperature range of 0 to 40 °C and after a 45-minute warm-up period. All specifications include measurement uncertainty and were created in compliance with ISO-17025 methods.

Typical (typ)

The characteristic performance, which 80% or more of manufactured instruments will meet. This data is not warranted, does not include measurement uncertainty, and is valid only at room temperature (approximately 23 °C).

Nominal (nom)

The mean or average characteristic performance, or the value of an attribute that is determined by design such as a connector type, physical dimension, or operating speed. This data is not warranted and is measured at room temperature (approximately 23 °C).

Measured (meas)



An attribute measured during development for purposes of communicating the expected performance. This data is not warranted and is measured at room temperature (approximately 23 °C).

Accuracy

Represents the traceable accuracy of a specified parameter. Includes measurement error and timebase error, and calibration source uncertainty.

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



1939

THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-12-01-15)



www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

myKeysight

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with a three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



Keysight Infoline

www.keysight.com/find/service

Keysight Infoline

Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

PCI-SIG®, PCIe® and the PCI Express® are US registered trademarks and/or service marks of PCI-SIG.

www.keysight.com/find/m8196a



Unlocking Measurement Insights

This information is subject to change without notice.
© Keysight Technologies, 2015
Published in USA, January 4, 2016
5992-0971EN
www.keysight.com