


Mini Digital Clamp Tester

AC Current ,20A/200A ,33mm ϕ CT

Model 220 (CE)

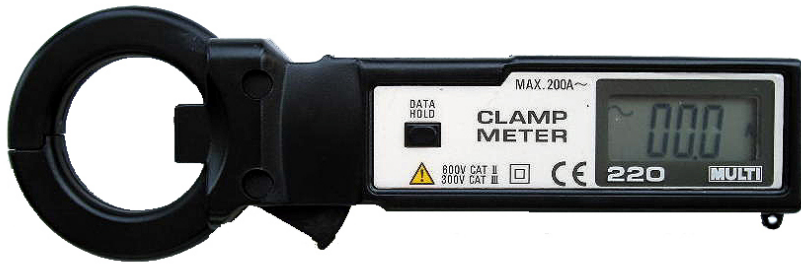

FEATURES

- 33mm ϕ CT window and ultra compact size.
- Data-hold function. Especially useful when working in dark or hard to get areas.
- Conform to IEC safety requirements.

SPECIFICATIONS

Safety standard	: IEC 61010-1, IEC 61010-2-032 ,Installation Category II 600V or Category III 300V.
E.M.C. standard	: EN 61326.
Measuring method	: Dual slope integration mode
Display	: 3.5 digit LCD, max. reading of 1999
Range	: AC 0~20A/200A

Accuracy 23°C ± 5°C 80%RH or less (50/60Hz)

Range	Resolution	Accuracy
AC 20A	10mA	± 1.2% rdg ± 5 dgt
AC 200A	100mA	± 1.2% rdg ± 5 dgt

Jaw opening capability	: 33mm φ
Over range indication	: Blanking of all digits except MSD 1
Low battery indication	: "B" mark on LCD
Data hold indication	: "DH" mark on LCD
Sampling	: 2 times/sec.
Withstanding voltage	: AC 3700V 1 minute max. (Between the core of CT and outer case)
Operating temperature	: 0°C to 40°C, 80%RH max. (Without condensation)
Storage temperature	: -10°C to 60°C, 70%RH max. (Without condensation)
Power supply	: 1.55V (SR-44, LR-44) × 2
Power consumption	: 3mW
Battery life	: SR-44 (200 hours), LR-44 (100 hours)
Size	: 54(W) × 167(H) × 23(D)mm
Weight	: Approx. 100g
Accessories	: Soft case.....1 Instruction manual.....1 Batteries LR-44(1.55V).....2